


变更 CHANGE			
版本 EDITI	变更内容 MODIFICATION	变更日期 UPDATE DATE	签名 SIGNATURE

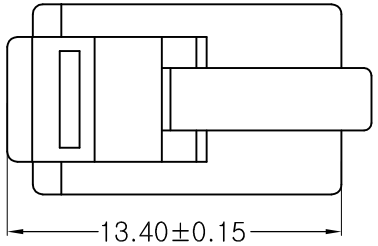

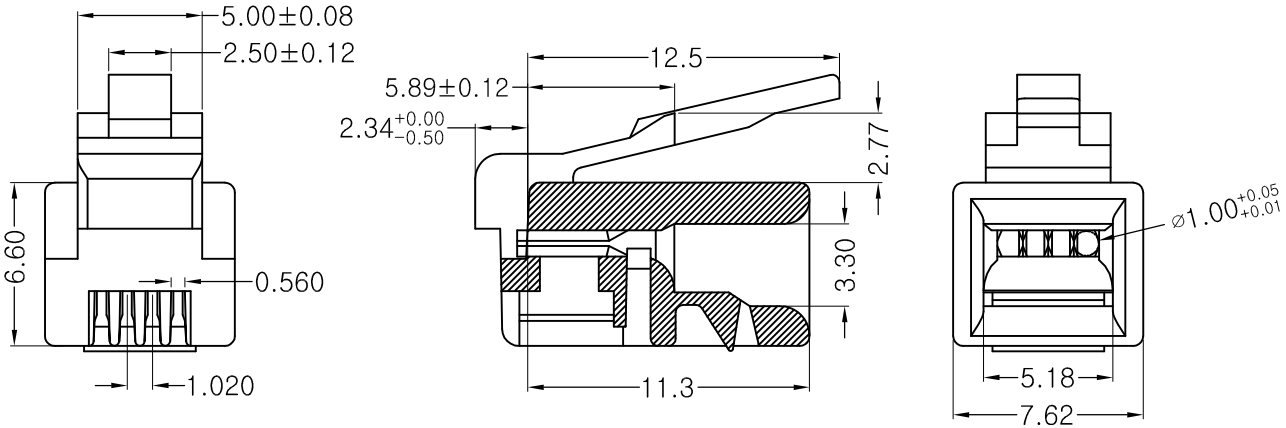

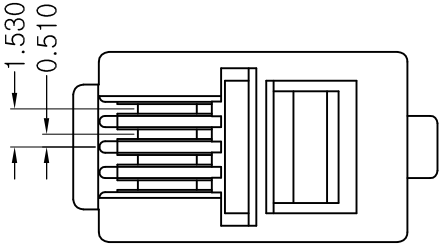

KAUDEN LJ4P4C

☐ 磷铜

印章

Inspection for Environmental Protection:

Based on the performed tests on submitted sample,
the test results are Compliant with the limits of RoHS and REACH.

Electrical Test:

A. 250V AC max, at 2A.
B. Dielectric withstanding 1000V DC/min, <0.5A.
C. Insulation Resistance: >500 MΩ, 1000V DC/min.
D. Contact Resistance: <20 MΩ.

Mechanical:

A. Cable-to-plug tensile strength-20LBS(89N)min.
B. Durability: 2000 mating cycles.

Operating Temperature: -40℃～+125℃.

环保测试：

通过RoHS、REACH之安全物质使用的检验标准。

电气特性：

A. 250伏特AC. 最大2安培耐电压伏特数。
B. 耐电压测试：小于0.5安培 1000伏特DC/一分钟。
C. 绝缘抗阻：1000伏特DC/一分钟，大于500百万欧姆。
D. 接触阻抗：不大于20毫欧姆。

机械特性：

A. 拉力测试：电缆至插座张力强度至少一分钟20磅(89N)。
B. 耐力测试：插拔测试2000次以上。

使用温度范围：-40℃～+125℃。

金片 TERMINAL	M2405	M2333S				OTHER
图形 DRAWING						
标记 MARK	◯					

镀金 GOLD PLATING	FU	1U	3U	6U	15U	30U	50U	OTHER
标记 MARK			◯					

材质 MATERIAL	PC	单位 UNIT	MM	比例 SCALE	NULL	版本 EDITI	B/0
尺寸公差表 DIMENSIONAL TOLERANCE X.X ±0.2 X.XX ±0.10 X.XXX ±0.050 ANGLE ±2°		第三视角法 THIRD ANGLE PROJECTION		制图 DRAWN	Min Lee	日期 DATE	2012.04.20
				核对 CHECK		日期 DATE	
				批准 APPROVAL		日期 DATE	